



Model: AL1950WX

19x50W Led Wash IP



LIGHT SOURCE:

LED lamp: 19x50W RGBS 4in1 LED
Backlight LED: 210PCS RGB 3in1 LED
Extremely long life: < 40,000H

SPECIFICATIONS:


Input Voltage: AC 100 ~ 240V, 50/60Hz
Power Consumption: 950 W maximum
Beam Angle: 6° to 55°
2D & 3D graphical effects
ArtNet™ & sACN protocol
IP65

CONTROL PROTOCOL:

Control: DMX/RDM/ArtNet™ & sACN protocol
4 DMX modes: 26/50/50/127 channels

PHYSICAL SIZE:

N.W: 17kg
Dimension: 349 x 216.5 x 350mm

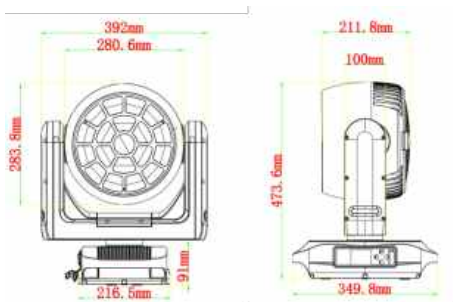



Model: AL1036WZ

36x12W Led Moving head zoom



LIGHT SOURCE:

Source: 36pcs 12W 4-in-1 LEDs

SPECIFICATIONS:

Voltage: AC90-240V 50/60Hz

Power: 360W

Source: 36pcs 12W 4-in-1 LEDs

Strobe: 1-25Hz

Color: RGBW infinite color mixture system

Beam Angle: 12-55 Degree

Pan: 540°+Fine Tilt: 280°+Fine

Function: RGBW mixing to seven colors,color optional,dimmer, stroboscopic, X/Y rotate and speed controllable.

CONTROL PROTOCOL:


Channel: 14CHs

Control: DMX/Master-Slave/Auto/Sound

PHYSICAL SIZE:

N.W:6.5kg

Dimension:425x295x390mm

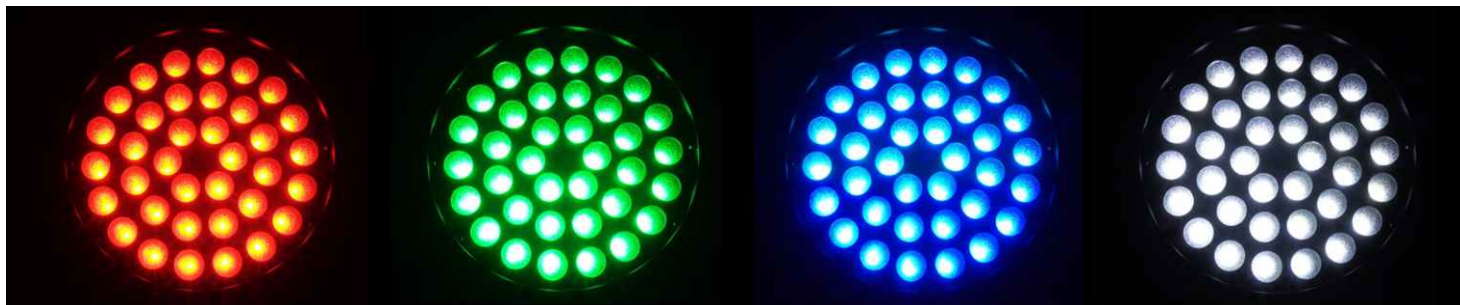



Model: AL1940WZ

19x40W Led Wash Moving Head Halo



LIGHT SOURCE:

LED Source: 19x40W high power RGBW 4 in 1 LEDs

SPECIFICATIONS:

Voltage: AC100V~240V 50-60HZ

Rated Power: 850W

Zoom: 7°-45°

Strobe: 0-25Hz

Dimmer: 0-100% linear dimmer with 4 kinds of dimmer curve.

Pan: 540°+16 bit fine

Tilt: 220°+16 bit fine

Display: LCD display with touch buttons.

IP: IP20

CONTROL PROTOCOL:




Control Mode: DMX512, Sound-activated, Master/slave

DMX Channels: 21/26/36/43/78/119 ch

PHYSICAL SIZE:

N.W:15.2kg

Dimension:434x260x577 mm





Model: AL1019WZ

19x12W Led Wash Moving Head



LIGHT SOURCE:

Led Source: 19x15W Led RGBW 4 in 1 +30pcs 0.18W RGB 3in1

SPECIFICATIONS:


Movement: PAN: 540° / Tilt: 270°
Zoom angle: 8-50 degrees
Effect: Beam wash&Eye Candy effect

CONTROL PROTOCOL:

Control: DMX512/Master-slave/Auto/Sound
Channel: 16/24 ch

PHYSICAL SIZE:

N.W :7.7KG
Size: 38x26x47.5 cm

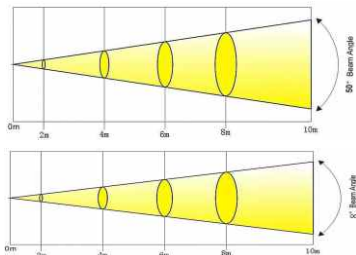



Model: AL1019WR

19x15W Led Bee Eye Moving Head



LIGHT SOURCE:

LED Source: 19x15W high power RGBW 4 in 1 LEDs

SPECIFICATIONS:





Voltage: AC100V~240V 50-60HZ
Power: 450W
Zoom: 4-60° Strobe: 0-20Hz
Dimmer: 0-100% linear dimmer
Pan: 540°+16 bit fine Tilt: 270°+16 bit fine
Display: LCD colorful display
IP: IP20
Rechargeable Battery: Optional
Artnet: Optional

CONTROL PROTOCOL:

Control Mode: DMX512, Sound-activated, Master/slave
DMX Channels: 21 /23 /35 /78 /92 /97 /99 CH

PHYSICAL SIZE:

Fixture dimension: 415x275x425 mm
Carton package Size: 53x42x51CM (1pcs/ctn)
N.W:14.95 KG
G.W: 18.1KG

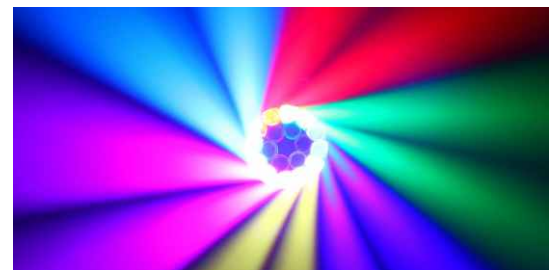



Model: AL740W2

7x40W Led Wash Moving Head Halo



LIGHT SOURCE:

Led Source: 7pcs 40W RGBW 4 in 1+RGB ring lights

SPECIFICATIONS:

Voltage :AC90-240V 50/60Hz

Power : 350W

Zoom Angle :3-60°

Horizontal sweep:540 degree

Vertical sweep:270 degree

Strobe : 1-25 times per second or random

Display : LCD display

CONTROL PROTOCOL:



Control model : DMX / Master-slave / Voice control

Channel : 18CH/29CH/47CH/51CH

PHYSICAL SIZE:

N.W :6.5KG

Size: 266x207x258cm





Model: AL1240WZ

12x40W Led Wash Pixel



LIGHT SOURCE:

Source: 12pcs 40w high brightness RGBW 4-in-1 leds

SPECIFICATIONS:

Voltage: AC90-240V 50-60HZ

Max Power: 550 w

Dimmer: 0-100% linear dimming system

Strobe: 1-25 times/second

Pan: 540° with 16 bit fine

Tilt: 270° with 16 bit fine

Zoom: 5-60° Smooth and fast zoom system

LED working lifetime: Average 20,000 hours with low power consumption

Color: RGBW infinite mixture

Display: LCD display

CONTROL PROTOCOL:


Control: DMX512/master-slave/auto/sound

Channel: 19/67ch

PHYSICAL SIZE:

Fixture size: 338 x 264 x 470 mm

N.W: 14.2KG

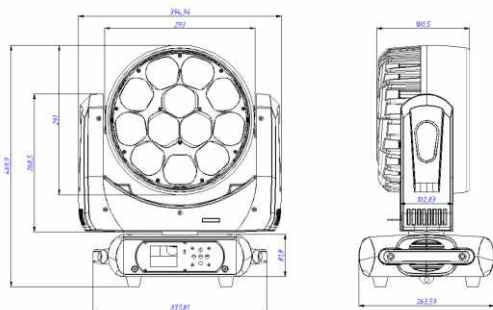



Model: AL3715WZ

37x15W Led Wash Moving Head



LIGHT SOURCE:

Source: 37pcs 15w high brightness RGBW 4-in-1 leds

SPECIFICATIONS:

Voltage: AC90-240V 50-60HZ

Max Power: 600 w

Dimmer: 0-100% linear dimming system

Strobe: 1-25 times/second

Pan: 540° with 16 bit fine

Tilt: 270° with 16 bit fine

Zoom: 5-60°

LED working lifetime: Average 50,000 hours with low power consumption

Suitable environment: Indoor

Color: RGBW infinite mixture

Display: LCD display

CONTROL PROTOCOL:

Control: DMX512/master-slave/auto/sound



Channel: 14/17/20/26/48ch

PHYSICAL SIZE:

Fixture size: 386 x 423 x 263 mm

N.W: 13.5KG

G.W: 15KG





Model: AL1940WR

19X40W Led Wash Moving Head Mini



LIGHT SOURCE:

19*40W RGBW 4 in 1 LEDs

SPECIFICATIONS:


AC110-240V 50/60 Hz
 Power consumption: 500W
 Average life: 50,000 hrs
 Color temperature: 2500K-8000K
 Zoom angle: 4-60°
 Wash/Beam/Graphic/Effects function
 Front lens can rotated infinity
 With "vortex" and "kaleidoscope" effects
 Variable built-in dynamic effects
 4 Liner dimming curves
 2 color mode (RGBW / CMY)
 Strobe: 1-25 hz, random and pulse flash

CONTROL PROTOCOL:

Control mode: DMX512
 DMX channels: 21/35/78/92/97

PHYSICAL SIZE:

Fixture size: 474x342x254mm
 N.W: 15.6KG

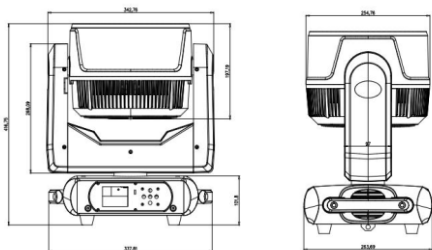



Model: AL3740WR

37x40W Led Bee Eye



LIGHT SOURCE:

LED Source: 37x40W high power RGBW 4 in 1 LEDs

SPECIFICATIONS:

Voltage: AC100V~240V 50-60HZ

Rated Power: 1450W

Zoom: 7°-50°

Strobe: 0-25Hz

Dimmer: 0-100% linear dimmer with 4 kinds of dimmer curve.

Pan: 540°+16bit fine

Tilt: 250°+16bit fine

Display: LCD display with touch buttons.

Temperature control: intelligent temperature control, which can automatically adjust the speed and overheating protection of the heat fan.

IP: IP20

CONTROL PROTOCOL:

Control Mode: DMX512, Sound-actived, Master/slave

DMX Channels: 22/35/36/132/146/169 ch

PHYSICAL SIZE:




Fixture dimension: 496x293x590cm

N.W: 26 Kg

G.W: 30.8 Kg

Package dimension: 61.5x61.5x54CM (1pc/ctn)

Flight Case Size: 78x58x82 (2pcs/case) G.W: 83kg

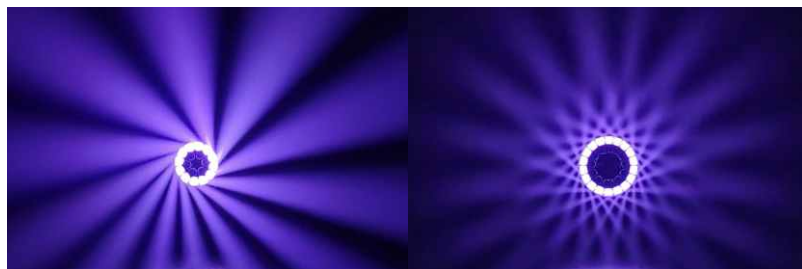



Model: AL0760WP

7X60W Led Wash Moving Head IP



LIGHT SOURCE:

Light source: 7x 60W (4in1 RGBW) high brightness LEDs
Filament Aura: 12x 3W (3in1 RGB) LED filament

SPECIFICATIONS:


Voltage: AC90-240v 50-60HZ
Rated power: 550W
Beam angle: 7-45°
Strobe: 1-25HZ with multiple strobe effects
Color: RGBW color mixing with very bright and vibrant saturated colors, as well as soft pastels and white tones. Tungsten Emulation Option.Virtual Color Wheel.
Protection level: IP65

CONTROL PROTOCOL:

Channel: Built-in 6 channel modes 21/30/36/57/78/93CH
Control: DMX512, Auto, RDM, Art-Net (Support for additional installation)

PHYSICAL SIZE:

Fixture dimension: 38.6*29.1*53.3cm
Carton size (1pc/ctn): 63*47*36cm
NW.: 19.5kg GW.: 22.5 kg
Flight case size(2pcs/case): 96*45*78cm
Flight case NW.: 31kg; GW.: 72kg

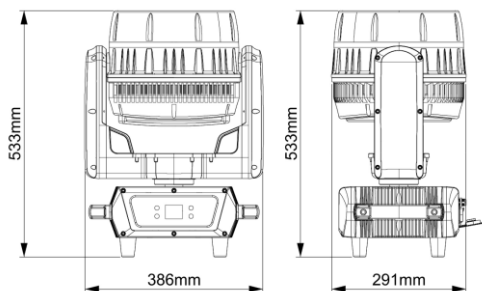



Model: ALO760WR

7x60W Led Wash Moving Head



LIGHT SOURCE:

Light source: 7x 60W (4in1 RGBW) high brightness LEDs
Filament Aura: 12x 3W (3in1 RGB) LED filament

SPECIFICATIONS:




Voltage: AC90-240v 50-60HZ
Rated power: 550W
Beam angle: 7-45°
Strobe: 1-25HZ with multiple strobe effects
Color: RGBW color mixing with very bright and vibrant saturated colors, as well as soft pastels and white tones. Tungsten Emulation Option.
Virtual Color Wheel.
IP Rating: Ip20

CONTROL PROTOCOL:

Channel: Built-in 6 channel modes 21/30/36/57/78/93CH
Control: DMX512, Auto, RDM, Art-Net (Support for additional installation)

PHYSICAL SIZE:

Fixture dimension: 35.6×28×45cm
Carton size (1pc/ctn): 43.5*36*52.5cm
NW.: 14.6kg GW.: 18.5 kg

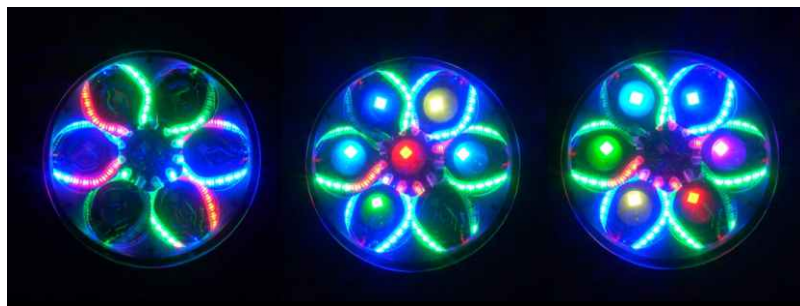



Model: ALP3740WR

37 x40W RGBW LED Bee Eye IP



LIGHT SOURCE:

LED Source: 37x40W RGBW 4 in 1

SPECIFICATIONS:

Voltage: AC100V~240V 50-60HZ

Rated Power: 1450W

Zoom: 7°-50°

Strobe: 0-25Hz

Dimmer: 0-100% linear dimmer with 4 kinds of dimmer curve.

IP: IP65

CONTROL PROTOCOL:



Control Mode: DMX512, Sound-activated, Master/slave
DMX Channels: 21/22/35/36/111/148 sixchannel mode

PHYSICAL SIZE:

Fixture dimension: 530x279x663mm

N.W: 32.2 Kg

G.W: 37.8Kg

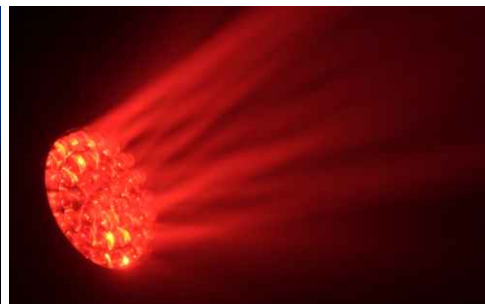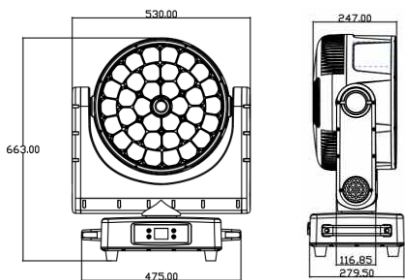



Model: AL1940WP

19 × 40W Bee Eye RGBW LED IP



WHITE
LED

Auto



IP65

LIGHT SOURCE:

Light source: 19 × 40W RGBW LED

SPECIFICATIONS:

AC100V-240V/50-60Hz

Power consumption: 850W

Color temperature: 2500~10000K

Zoom angle: 7-42°

Wash/Beam/Graphic/Effects function

Front lens can rotated infinity

LED halo ring with rainbow effect

With "vortex" and "kaleidoscope" effects

Variable built-in dynamic effects

4 Liner dimming curves 2 color mode (RGBW)

Strobe: 1-25 hz, random and pulse flash

IP65

CONTROL PROTOCOL:




Control mode: DMX512/RDM/Master Slave

DMX channels: 21/35/78/92/97/43

PHYSICAL SIZE:

Dimension: 432x333x485mm

NW.: 22KG

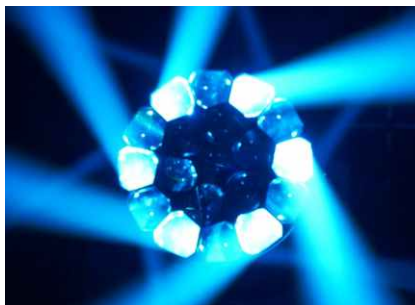



Model: AL1960WR

19X60W Led Wash Moving Head Bee Eye



LIGHT SOURCE:

LED Source: 19x60W high power RGBW 4 in 1 LEDs

SPECIFICATIONS:

Voltage: AC100V~240V 50-60HZ

Rated Power: 1350W

Zoom: 11°-55°

Strobe: 0-25Hz

Dimmer: 0-100% linear dimmer with 4 kinds of dimmer curve.

Pan: 540°+16 bit fine

Tilt: 220°+16 bit fine

Display: LCD display with touch buttons.

IP: IP20

CONTROL PROTOCOL:

Control Mode: DMX512, Sound-activated, Master/slave

DMX Channels: 21/35/78/92/97 five channel mode

PHYSICAL SIZE:


Fixture dimension: 465*300*510mm

Package Dimension: 62*57*49 cm

N.W: 21.4Kg

G.W: 25.5Kg (Carton)

Flight Case Size: 78*52*79 cm(2pcs/case) G.W:74.5 kg (2pcs)

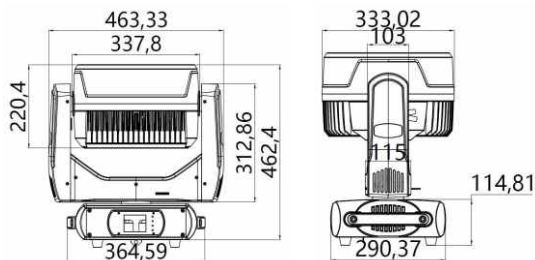



Model: ALP3740WR

37 x40W RGBW LED Bee Eye IP



LIGHT SOURCE:

LED Source: 37x40W high power RGBW 4 in 1 LEDs

SPECIFICATIONS:

Voltage: AC100V~240V 50-60HZ

Rated Power: 1450W

Zoom: 7°-50°

Strobe: 0-25Hz

Dimmer: 0-100% linear dimmer with 4 kinds of dimmer curve.

Pan: 540°+16bit fine

Tilt: 250°+16bit fine

Display: LCD display with touch buttons.

IP: IP65

CONTROL PROTOCOL:

Control Mode: DMX512, Sound-activated, Master/slave

DMX Channels: 21/22/35/36/111/148ch

PHYSICAL SIZE:

Fixture dimension: 530x279x663mm

N.W: 32.2 Kg

G.W: 37.8Kg

Package dimension: 79.5x65x42cm(1pc/ctn)

